

# PRODUCT GUIDE 2024



# PRESIDENT’S MESSAGE



If you Master “Fast Uniform Emergence” you are in fact a “Seeding Master” as well as a “CanolaMaster” and the resulting profits will be your reward.

The sales results of SeedMaster’s 2022-2023 year proves to me that “Fast Uniform Emergence” is the performance metric that matters most to progressive farmers. The sales numbers have blown away any previous years’ numbers. The time tested and trusted opener precision placement and packing

of both products, the UPII superior metering performance, as well as the SR’s excellent handling of surface residue all work together to give farmers that assurance of “Fast Uniform Emergence”. The continued “proof is in the pudding” (or in this case the resulting profits) are leading farmers to the SeedMaster product lines like no time in the past.

The loyal team and the modern facility has met the challenge of this fast company growth without jeopardizing the customer support we are famous for. Meeting promised delivery dates, having sufficient parts and trained dealers, and providing seven-days-per-week customer support during seeding have all led to SeedMaster’s solid reputation. SeedMaster’s planned expansions will help maintain these high standards.

I must say as well that I’m proud of our engineering team with their ability to come up with new novel options and full machine designs that will continue to have SeedMaster recognized as “The Leader by Design”. One of this years big winners is the fast depth adjustment design that almost all farmers are

choosing. In the past, many farmers have been happy to seed most of their crops at a factory depth setting of 3/4” below the packed surface, but with increased awareness of small adjustment benefits (as small as 1/8”), they can better adjust to soil moisture and temperature changes. All individual row opener designs have the unfortunate byproduct of having to crawl to each opener to adjust depth but now the depth change is fast and easy. The SR has the added advantage of simply walking behind instead of crawling. The vast improvements in small details on the SR continues to make the SR low maintenance requirements and high in performance. There is also a new air cart design being unveiled that will leapfrog competitors units. This will round out SeedMaster’s product line offering.

In closing, I wish everyone a successful 2023 farm year with enough free time to enjoy life beyond farming.

Thanks for your support,

**Norbert Beaujot, P. Eng.**  
*President, Founder, Visionary*

# CONTENTS

1	MESSAGE FROM THE PRESIDENT	2	TABLE OF CONTENTS
3-6	ULTRA SR SINGLE RANK TOOLBAR	7-12	SEEDMASTER TOOLBAR
13-16	ULTRAPRO II ON-FRAME SYSTEM	17-18	24 - FOOT TOOLBAR
19-22	NOVA SERIES II AIR CART SYSTEM	23-24	FIELD TECHNOLOGY
25-26	DETAILED DIMENSIONS	27-28	VISION. PROMISE. VALUES.



# ULTRA SR



**RESIDUE WHEEL**



**EASY TANK ACCESS**



**PRECISION METERS**




**FAST LOC**


## SINGLE RANK. MULTIPLE BENEFITS.

SeedMaster's revolutionary Ultra SR is the first single rank precision seeding tool on the market. This advanced, fully integrated seeding system combines the best in SeedMaster technology: our proven, dual-knife opener and UltraPro II metering. At 60 feet wide with 750 bushels of total capacity, the Ultra SR increases maneuverability and contours to the land to ensure precise seed and fertilizer placement.

## INCREASED FLEXIBILITY. MORE OPENER OPTIONS.

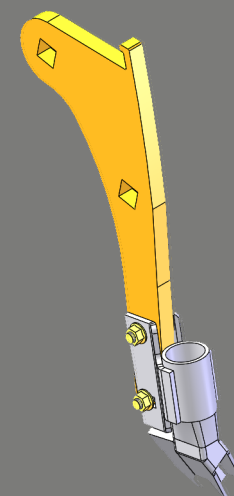

**INLINE SIDEBAND**

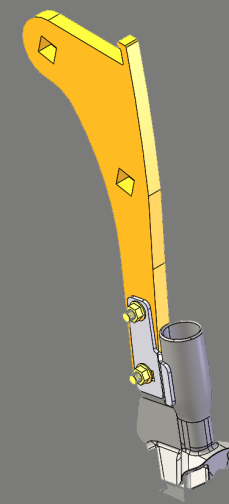

**INLINE PAIRED ROW**

### STANDARD FEATURES

- Implement Length: 41'
- Tank Height: 15' 5"
- Rear Tires (under tanks): Dual 710s
- Residue Management System: 40 inch rotating residue wheels for heavy residue clearance
- Two Interchangeable Rollers: (1) Canola/fine & (2) general purpose (for pulse, cereal, canola, inoculant, and fertilizer)
- Distribution System: No manifolds - direct metering of product into individual air streams, two fans, separate air systems for seed and fertilizer tanks - Non Pressurized Tanks
- UltraPro II Seed Tank: 240-bushel seed and 60 bushel seed/inoculant/starter fertilizer
- UltraPro II Fertilizer Tank: 150-bushel fertilizer (or possibly another seed for intercropping practices), 300-bushel fertilizer
- Hydraulic Jack: For quick and effortless tractor hook up
- Metering System: UltraPro II electric drive with turn compensation
- Michel's Roll Tarps: Industry-leading tarps for easy filling (electric tarp option)
- Draft Requirements: 400-500 horsepower requirement with Category 5 hitch requirement (lower horsepower requirements compared to your traditional seeder due to number of openers and lower weight)
- Hydraulic Requirements: 45-60 gal/min minimum
- Electrical Requirements: 200 amp alternator required, 240 recommended
- Fast Loc Depth Adjust: Adjust opener depth in under 5 minutes

### OPTIONS

- Light Package
- Michel's Electric Roll Tarps
- Raven Viper 4+
- Liquid Fertilizer Tank: Replaces the two rear fertilizer tanks (2580 US gal/ 2150 imp gal)



CONFIGURATION

WORKING WIDTH		ROW SPACING		# OF ROWS	FRAME STYLE	APPROX TRANSPORT HEIGHT		APPROX TRANSPORT WIDTH		# OF ZONES
FT	M	IN	CM			FT	M	FT	M	
60'	18.29	15"	38.1	48	M-Fold	16'6"	5.03	22'2"	6.76	4

“Our fields were not dirty with weeds. We had a lot of negativity because of the wider spacing, ‘you’re going to have weed problems’, but we did not. We did not disturb the soil. The only place we had weeds was in the drill rows.”

~Wade McAllister-CFO, Antler Valley Farm

“SeedMaster has created the iPhone of seeding equipment. The Ultra SR is lower in price, requires less horsepower, and is easier to operate. It has given us more uniformity, excellent emergence, and between the overlap control and UltraPro II metering, our drills will pretty much pay for themselves.”

~Trevor Paulovich- Alberta Farmer

“When we saw the new UltraSR single rank drill from SeedMaster, we were really drawn to it. The first thing we noticed was the simplicity of the UltraSR and thought in our hilly country, the single rank would contour our fields better. We found it contours the land much better than our 3-rank drill, gives us less soil disturbance, and better seed placement. We’ve always been impressed with the fast and uniform emergence with our SeedMasters, but the single rank was even better! In 2022, our first year with our new UltraSR drill, people said we were nuts going to 15”. But our plant populations were always there, and we didn’t experience any increased weed pressure. They thought we’d sacrifice yields, too. But in our side-by-side trials comparing the 15” to 12” spacing, we saw pretty much no difference. Sometimes the 15” beat the 12”, sometimes the 12” beat the 15” by a bit, but overall yields were pretty much the same. We just found the UltraSR to be the simplest, easiest to run seeding system, and like any other SeedMaster toolbar, it’s easy to maintain.”

~ Matthew Carles, Mattlee Joint Ventures, Radville, SK

WIDER ROWS - NO PROBLEM!

The SeedMaster Research Farm conducted a five-year, replicated study comparing yields using a SeedMaster Toolbar with both 10 and 15-inch row spacing. Conditions for this study were set as equally as possible, including the day seeding took place, drill speed, in-crop treatments, and the day the field was harvested.

The outcome of these tests showed similar results using both row spacing widths. The 15-inch row spacing yields equal or outperform a tighter row spacing, plus less openers are required, which means lower capital and maintenance costs, lower draft requirements, and additional savings in operational costs.

BENEFITS

- ▶ Fewer openers, lower equipment cost
- ▶ Reduced fuel consumption
- ▶ Less horsepower required
- ▶ Improved residue flow
- ▶ Reduced soil disturbance results in lower weed pressure between the rows
- ▶ Greater ability to seed between previous crop rows



10 IN ROW SPACING

YEAR	GRADE OFFER	TEST WEIGHT (lbs/bu)	PROTEIN (%)	MOISTURE (%)	YIELD (bu/acre)
2013	#2 Red	62.5	13.7	15.6	58.92
2014	#2 Red	61.7	13.6	13.1	55.7
2015	#2 Red	62.9	14.7	13.9	58.93
2016	#2 Red	61.2	14.3	14.9	52.72
2017	#1 Red	60.6	12.3	12.6	65.4
5 YEAR AVERAGE		61.78	13.72	14.02	58.33

15 IN ROW SPACING

YEAR	GRADE OFFER	TEST WEIGHT (lbs/bu)	PROTEIN (%)	MOISTURE (%)	YIELD (bu/acre)
2013	#2 Red	62.6	14.2	15.5	58.63
2014	#2 Red	61.8	13.6	13.1	54.1
2015	#2 Red	62.8	15	13.9	58.78
2016	#2 Red	61.3	14.1	14.9	53.9
2017	#1 Red	60.6	12.2	12.6	66.6
5 YEAR AVERAGE		61.82	13.82	14	58.4



# SEEDMASTER TOOLBAR

## BUILT TO OUTLAST.

The SeedMaster Toolbar delivers long-lasting performance you can trust. Our bolt-together steel frame and the protection of our blast-to-bare metal powder coating makes our toolbars durable and easy to maintain. The SeedMaster Toolbar also comes in second-to-none with its dual-knife opener. Our opener delivers precise seed and fertilizer placement, fast uniform emergence, and a field finish like no other.



**HEAVY DUTY FRAME**



**ACTIVE WING BRACE**



**PRECISION OPENERS**




**RESIDUE DEFLECTORS**

### NEW FOR 2024!: FLOATATION TIRE OPTION



- Galaxy Stubble Proof R-3 31x13.5-15 floatation tire option.

### STANDARD FEATURE: HYDRAULIC LIFT KIT

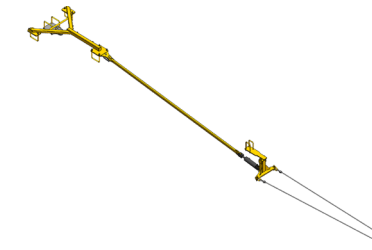

- Lifts the front of the toolbar in muddy conditions to aid in flotation

### STANDARD FEATURES

- Smart Openers: Lift and lower openers into the ground with an easy-to-use foot switch while also utilizing our ISO in-cab controller to adjust packing pressure
- Low Maintenance Opener Design: One of the lowest maintenance openers on the market - designed with parts that are built to last
- Active Wing Brace: Counteracts opener draft force to distribute frame stress
- Matrix Wing Lock: Partially unfolds each wing for lower transport height, ensuring safe travel under power lines and overpasses
- Residue Deflectors: Reduces residue build-up on knives, ensures optimal product placement, and delivers exquisite field finish
- Blast to Bare Metal Paint Procedure: Flawless powder coat paint adhesion for an anti-corrosive finish that won't crack, chip, or peel
- Equal Length Distribution Kits: 2 1/2-Inch formed stainless steel piping for equalized distribution
- 5-Year Frame Warranty


### OPTIONS

- Tank Configurations: Can be configured to fit all SeedMaster products, including the UltraPro II On-Frame Tank, Nova Series II Air Cart or our Liquid Nova Fertilizer Tank
- High Flotation Rear Axle: Pairs well with the SeedMaster lift kit for flotation in muddy conditions
- Front Walkover Hitch: Quickly access either side of your toolbar




## FAST, UNIFORM EMERGENCE.

Ensuring the highest yield potential begins with a seeding system that guarantees healthy and uniform emergence. This active-hydraulic, dual-knife opener delivers precise seed and fertilizer placement to allow each seed to get the perfect amount of nutrients to maximize germination.

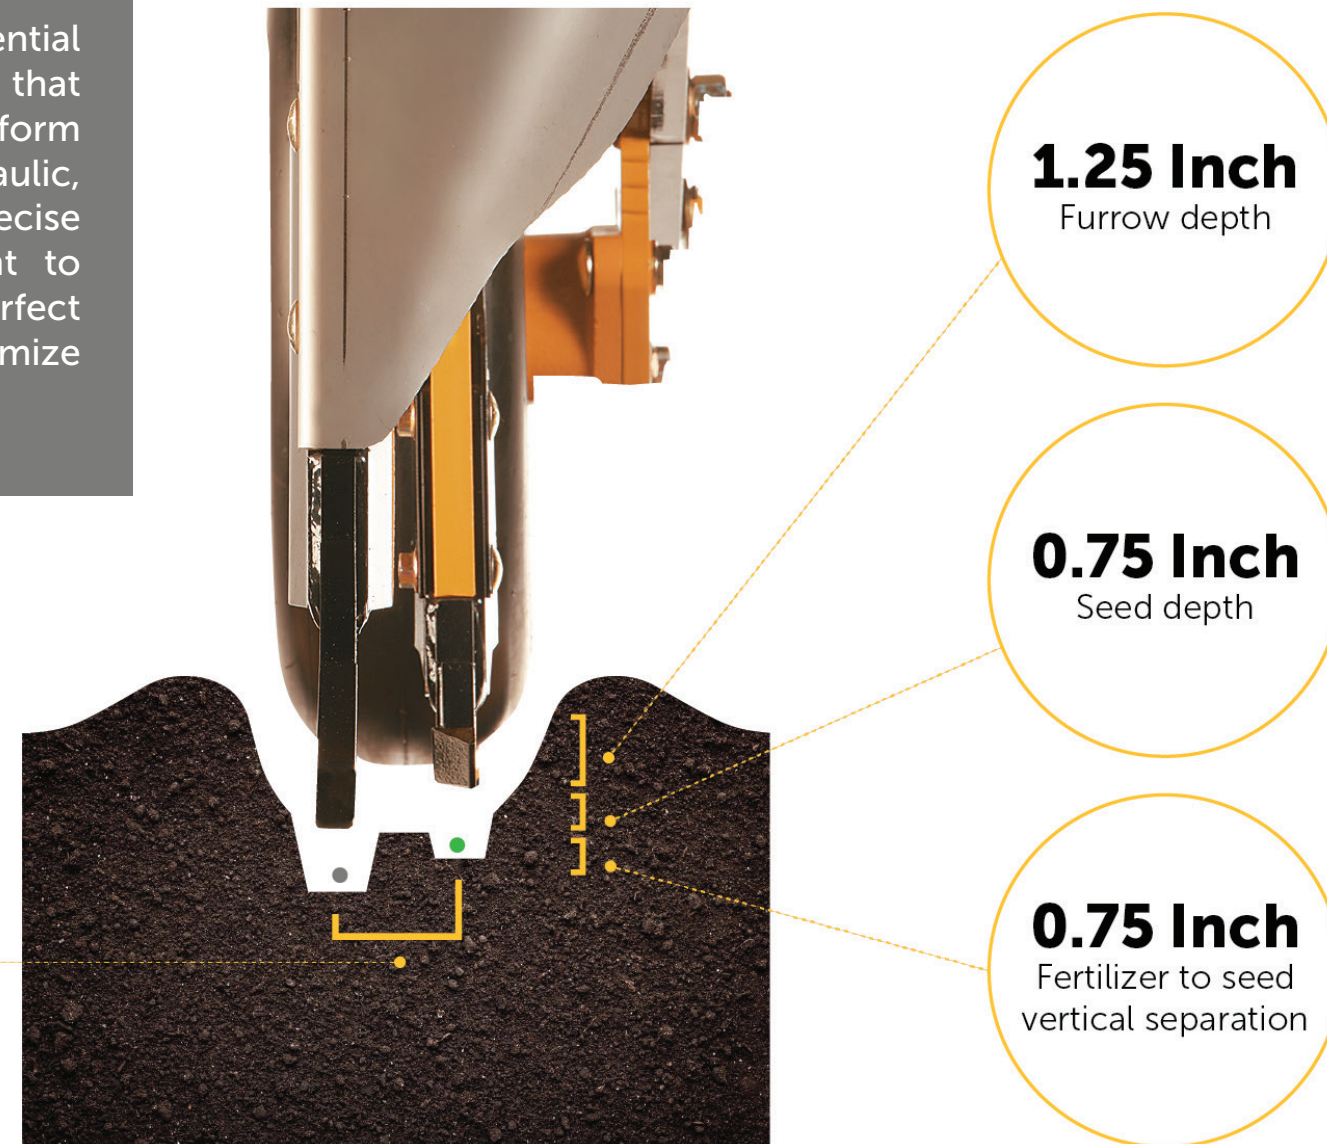


\* Depths can be adjusted as needed.

## THE OPENER

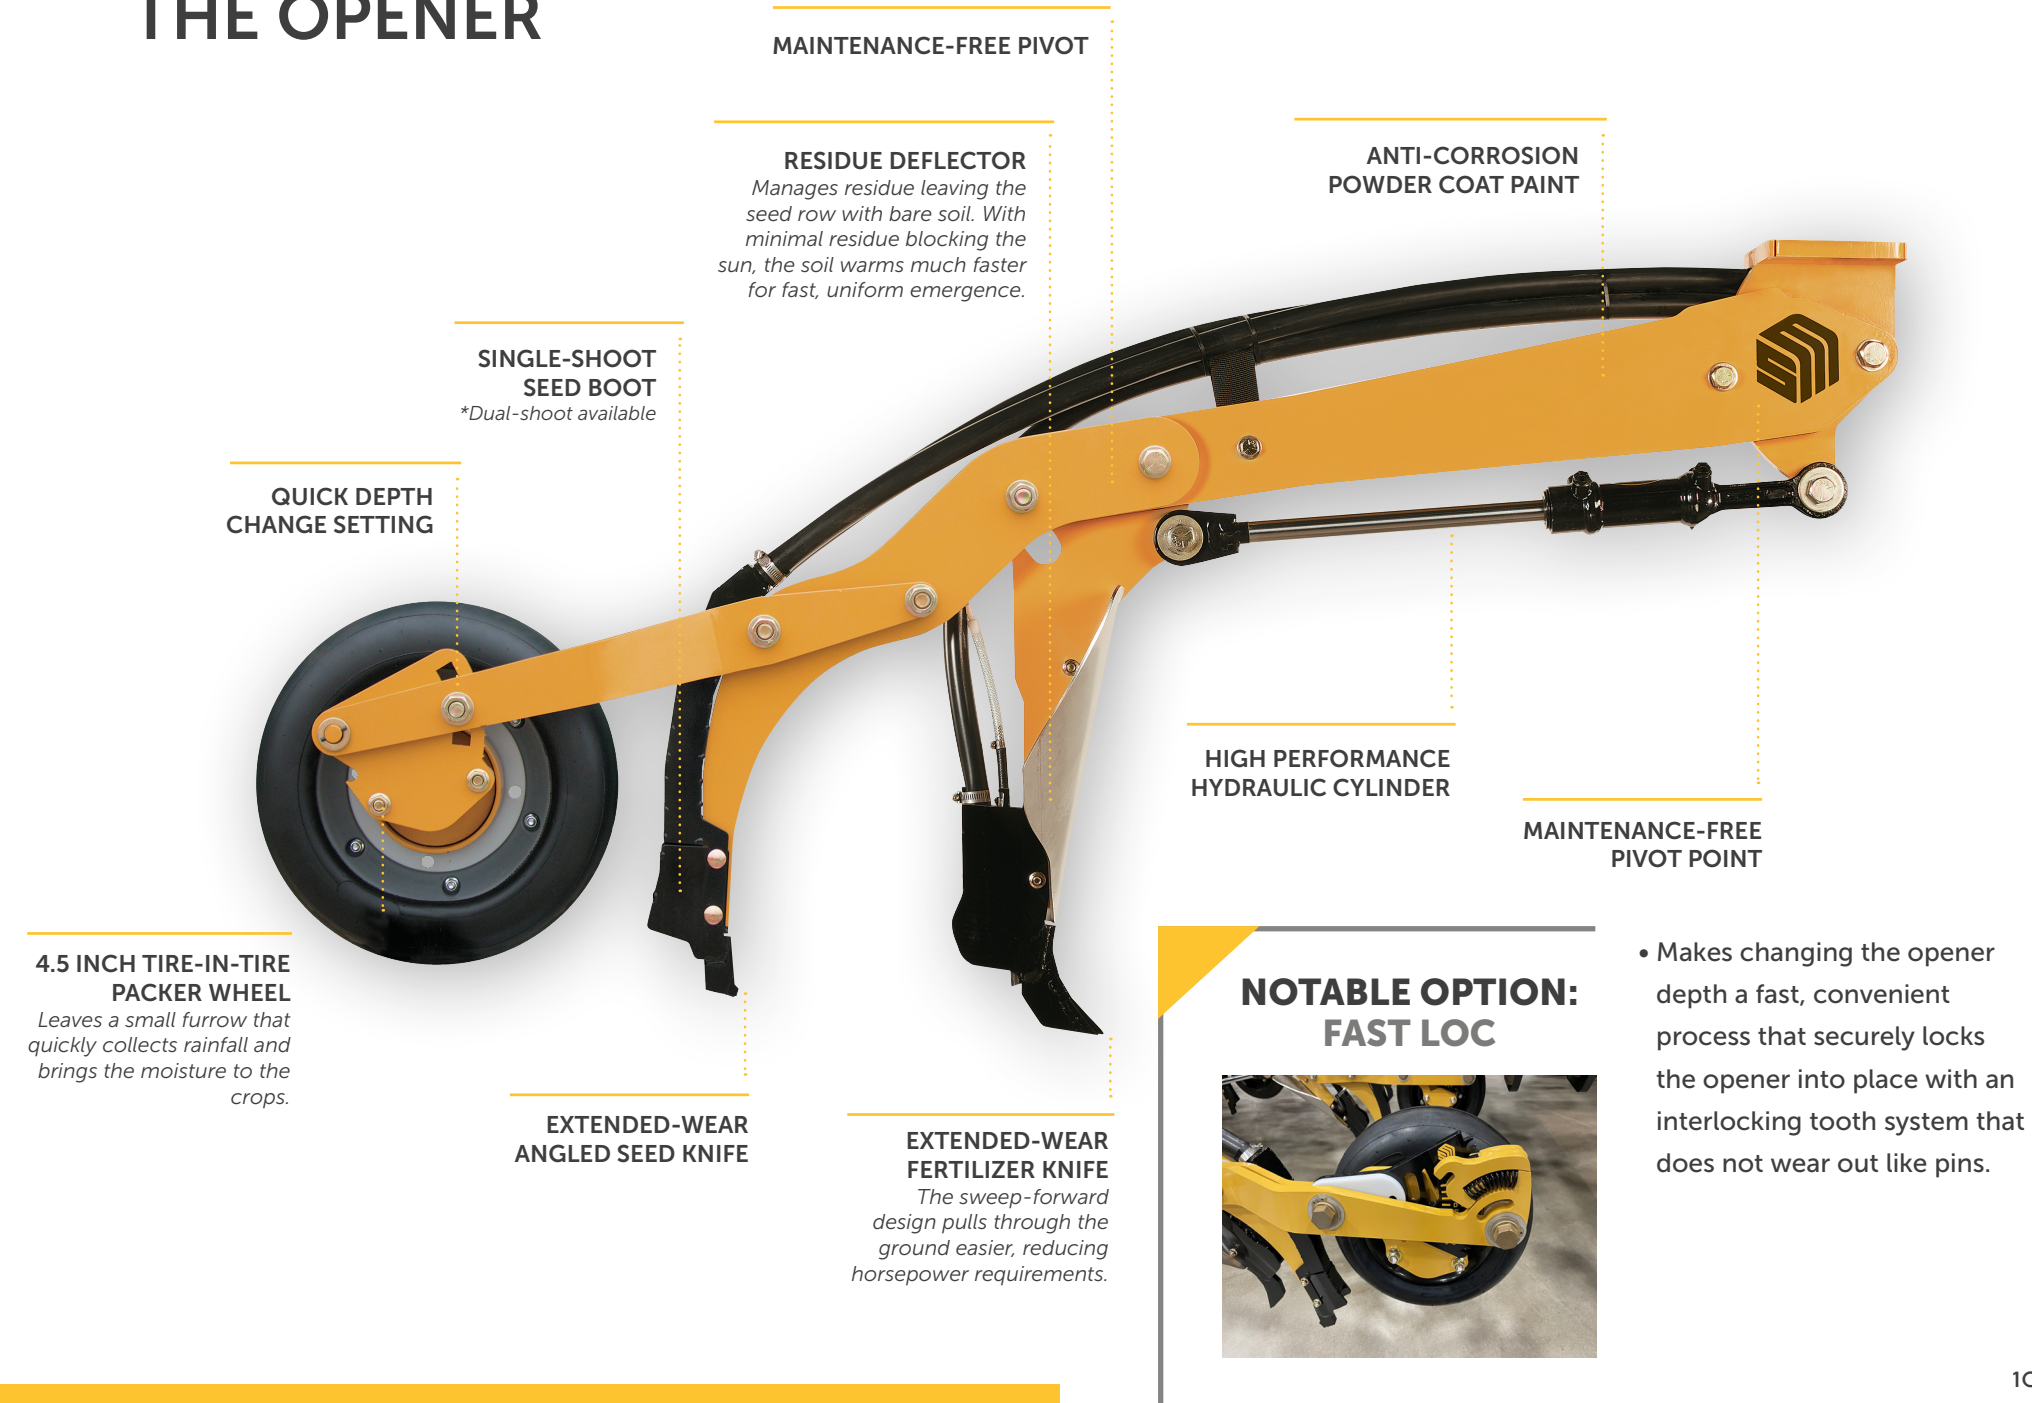




TOOLBAR CONFIGURATIONS

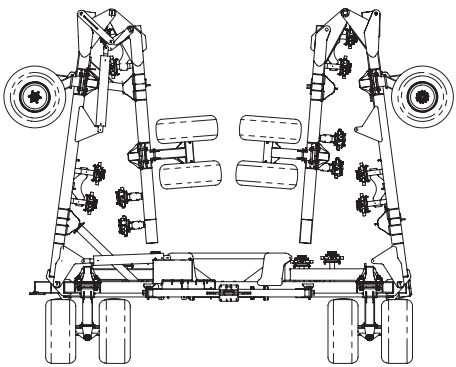

COMPACT M-FOLD

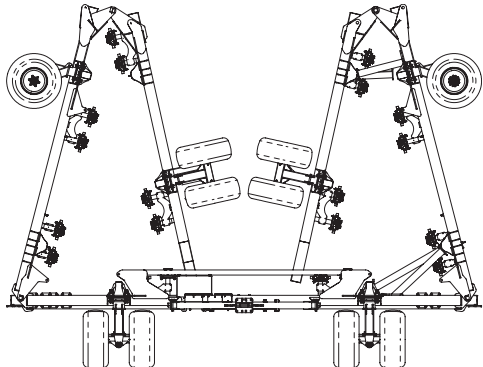

WIDE M-FOLD

WORKING WIDTH		ROW SPACING		# OF ROWS	FRAME STYLE	APPROX TRANSPORT HEIGHT		APPROX TRANSPORT WIDTH		# OF ZONES
FT	M	IN	CM			FT	M	FT	M	
40'	12.19	10"/12"	25.4/30.48	48/40	Compact M	16'2"	4.93	19'2"	5.84	8
50'	15.24	10"/12"	25.4/30.48	60/50	Compact M	13'9"	4.29	19'7"	5.94	8/10
60'	18.29	10"/12"/15"	25.4/30.48/38.1	72/60/48	Compact M	16'	4.88	20'8"	5.99	8/10
70'	21.35	10"/12"/15"	25.4/30.48/38.1	84/70/56	Compact M	18'2"	5.54	19'10"	5.66	8/10
80'	24.38	12"/15"	30.48/38.1	80/64	Compact M	20'4"	6.15	21'6"	6.53	8/10
80'	24.38	12"/15"	30.48/38.1	80/64	Wide M	17'9"	5.54	23'4"	7.72	8/10
90'	27.43	12"/15"	30.48/38.1	90/72	Wide M	21'	6.4	25'9"	7.85	10
100'	30.48	15"	38.1	80	Wide M	23'4"	7.11	26'1"	7.92	10

\* Other sizes are available on request. Customization conditions may apply.  
\* For more transportation details, please see page 33.  
\* Openers are factored in to all specifications.



SeedMaster is uniquely positioned to help domestic production reach its maximum yield potential using our proprietary seeding solutions that offer the gentlest seed handling, most vigorous Fast Uniform Emergence, all while generating significant seed cost savings up to **40%**.

Through the utilization of our innovative UltraPro II metering and distribution system found on both the on-frame UPII seeding systems as well as the exciting new Ultra SR single rank drill, farmers can give their canola crops the very best chance at reaching their full potential at seeding time. With near-zero seed mortality and planter-like singulation, it's no stretch to say we have unique solutions ideally suited to owning the canola.

\* Verified by third-party PAMI testing.




# ULTRAPRO II ON-FRAME SYSTEM



EASY ACCESS METERS



LOAD CELLS

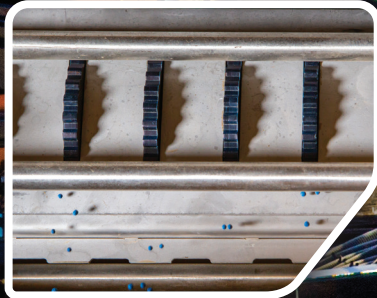

PRECISE METERS



EFFICIENT FANS

## STANDARD FEATURES


- Accurate Metering: Individual row metering for planter-like singulation and near-zero seed mortality
- High Capacity Venturi: Accommodating all seed sizes, high seeding rates and fertilizer application
- Tank Configurations: Multiple tank configurations available
- High-Capacity Individual Distribution Lines: Allows high product rates with uniformity across the drill
- Roller Options: Two interchangeable rollers: (1) for canola/inoculant/small seeds and (2) general purpose for pulse, cereal and fertilizer
- High Efficiency Fans: Gently moves high volumes of any seed, inoculant, or fertilizer directly to the opener for gentle and efficient distribution
- Variable Rate Ready: Variable rate application available for multiple products
- Overlap Control with Auto Zone Command: Prevents the over-application of seed and fertilizer
- Real-Time Product Weighing & Calibration: Load cells on each individual tank, along with Applied Product Calibration technology, ensures real-time product weighing and metering accuracy
- ISO Ready

## OPTIONS

- Raven Viper 4+: Control and monitor multiple functions on one display
- Bag Lift

## ULTIMATE PRECISION. DEFINED.

The UltraPro II On-Frame Tank System sets itself apart with gentle seed handling and incredible accuracy. Our on-frame system decreases input costs by significantly reducing seed mortality rates. This is attributed to the extremely gentle seed handling of our individual row metering and individual row distribution. With the UltraPro II, farmers can maximize their profitability and get the most out of each and every seed.

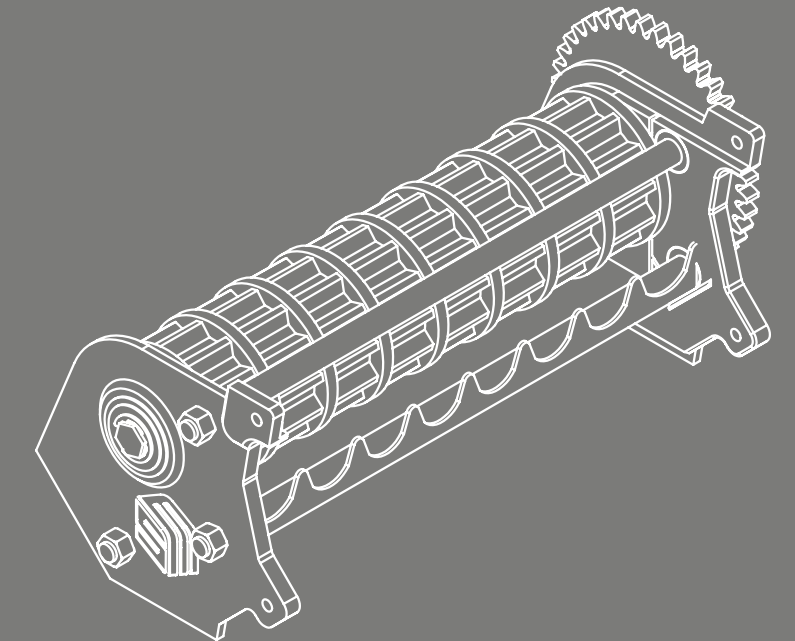



TANK CONFIGURATIONS


ULTRAPRO II 20

20 Bu.

705 L

Single-Shoot

Single Tank

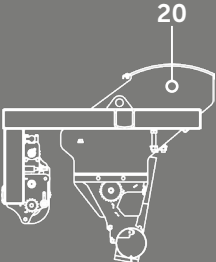


ULTRAPRO II 40

40 Bu.

1,410 L

Single-Shoot

Single Tank

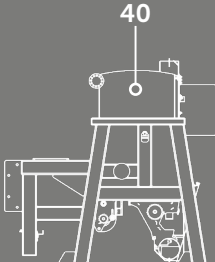


ULTRAPRO II 350

350 Bu.

12,334 L

Single-Shoot

Single Tank

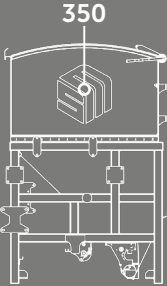


ULTRAPRO II 360

40/320 Bu.

1,410/11,277 L

Single-Shoot

2-Tank

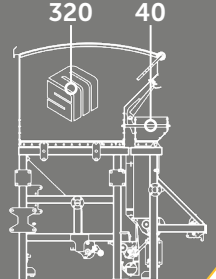


ULTRAPRO II 530

170/360 Bu.

5,991/12,686 L

Single-Shoot

2-Tank

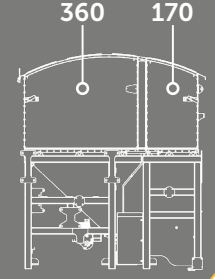


ULTRAPRO II 550

40/240/270 Bu.

1,410/8,457/9,515 L

Double-Shoot

3-Tank

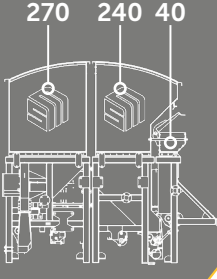

ULTRAPRO II ON-FRAME  
TOOLBAR OPTIONS

\* Each tank size is available with the below toolbar configurations.

WORKING WIDTH		ROW SPACING		# OF ROWS	FRAME STYLE	APPROX TRANSPORT HEIGHT		APPROX TRANSPORT WIDTH		# OF ZONES
FT	M	IN	CM			FT	M	FT	M	
40'	12.19	10"/12"	25.4/30.48	48/40	Compact M	16'2"	4.93	20'4"	6.20	8
50'	15.24	10"/12"	25.4/30.48	60/50	Compact M	15'9"	4.80	20'4"	6.20	8-10
60'	18.29	10"/12"/15"	25.4/30.48/38.1	72/60/48	Compact M	16'	4.88	20'4"	6.20	8-10
70'	21.34	12"/15"	30.48/38.1	70/56	Compact M	18'2"	5.54	20'4"	6.20	8-10
80'	24.38	12"	30.48	80	Compact M	20'2"	6.15	22'5"	6.83	8-10
80'	24.38	12"	30.48	80	Wide M	18'2"	5.54	25'4"	7.72	8-10

\* Other sizes are available on request. Customization conditions may apply.  
\* Configured using 800/65R32 tires.  
\* For more transportation details, please see page 34.






# 24-FOOT TOOLBAR



ULTRAPRO TANKS

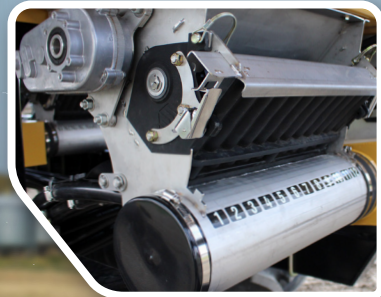

ULTRAPRO II METERING



PRECISION OPENERS



COMPACT DESIGN

## ADVANCED TECHNOLOGY, SIZED FOR MANEUVERABILITY.

The 24 Foot Toolbar with UltraPro II On-Frame Tank is ideal for small acre farms and ranches. In addition to its ability to maneuver through small spaces, this drill brings with it all of the benefits of a standard SeedMaster drill, including precise seed and fertilizer placement, and the uniformity and gentle seed handling of our UltraPro II metering.

### STANDARD FEATURES

- Tank Sizes: 100-bushel seed tank, 120-bushel fertilizer tank
- Product Delivery: UltraPro II On-Frame Tank and Metering
- Metering: UltraPro II electric drive with zone control
- Transport Width: Compact width for easy transportation
- Individual distribution lines
- Tractor Requirements: 175-200 horsepower requirement
- Hydraulics: 25-30 GPM @ 3000 PSI, 3 SCVs – opener raise/lower, wing folding fan
- Electronics: Drill and metering requires 12V, 50A continuous

### CONFIGURATION

WORKING WIDTH		ROW SPACING		# OF ROWS	FRAME STYLE	APPROX TRANSPORT HEIGHT		APPROX TRANSPORT WIDTH		# OF ZONES
FT	M	IN	CM			FT	M	FT	M	
24'	7.32	12"	30.48	24	3-Plex	12'6"	3.81	9'10"	3	2



# NOVA SERIES II AIR CART



**HYDRAULIC LIDS**



**LOAD CELLS**



**EFFICIENT FANS**



**PRECISE METERING**

## CAPACITY THAT KEEPS YOU GOING.

The Nova Series II has a gentle, nimble, user-friendly design that increases the precision, longevity, and efficiency of our air cart system. Along with an extensive list of upgraded features and benefits, it works seamlessly with the SeedMaster toolbar, has 10 zones of metering, and offers a wide range of capacity options to stay in the field longer between fills.

### NOTABLE UPGRADES:



- Metering: Improved bushings, housings, seals, and stainless-steel bearings
- Zone Command: Redesigned pivot arm that keeps idler gear engaged at all times
- Air Cylinders: Improved piston seal and an additional wiper seal
- Meter Drive: Reinforced with reduction drives to allow for high and low rate applications
- Inspection and Air Stream Plugs: Improved for easier isolated air stream selection
- New Wireless Remote: Now available with high-capacity conveyor option

### STANDARD FEATURES

- ISO connectivity and compatibility
- Delivery Fans: High capacity with low oil flow requirements
- Large walkway ladder steps for operator ease and safety
- Rear hitch options for liquid/NH3 ISO product carts
- Remote hydraulic lids close when fans are engaged from the tractor cab
- Overlap Control prevents over-application of seed and fertilizer
- Configured to meter up to 4 products at once - ideal cart for varying fertilizer rates and commodities to suit your farm
- Real-Time Product Weighing & Calibration: Load cells on each individual tank, along with Applied Product Calibration technology, ensures real-time product weighing and metering accuracy
- Variable rate ready

### OPTIONS

- High-capacity conveyor with slide-out hopper
- Raven Viper 4+ Field Computer control and monitor multiple functions on one display
- Liquid fertilizer tank



TANK CONFIGURATIONS


NOVA 520

260/260 Bu.

9163/9163 L

2-Tank

Tow behind &  
Tow between

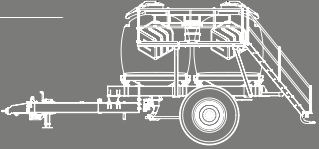


NOVA 560

260/260/40 Bu.

9163/9163/1410 L

3-Tank

Tow behind only

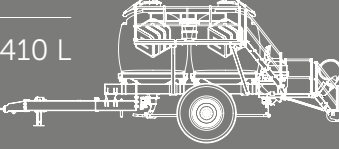


NOVA 630

260/260/110 Bu.

9163/9163/3876 L

3-Tank

Tow behind &  
Tow between

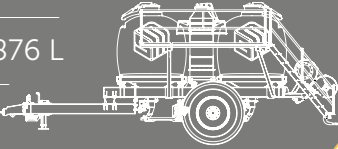


NOVA 780

260/260/260 Bu.

9163/9163/9163 L

3-Tank

Tow behind &  
Tow between

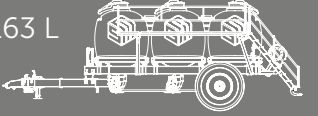


NOVA 820

260/260/260/40 Bu.

9163/9163/9163/1410 L

4-Tank

Tow behind only



NOVA TANK SPECS

\* TBH - tow behind & TBT - tow between

FEATURE	520	560	630	780	820
Total bushel capacity (bu / l)	520 / 18,324	560 / 19,734	630 / 22,201	780 / 27,487	820 / 28,896
Dry weight <i>*approx.</i> (lbs / kg)	15,500 / 7,031	17,500 / 7,938	19,400 / 8,800	27,700 / 12,565	29,500 / 13,381
Length with conveyor (ft / m)	35' / 10.7	36' / 11	35' / 10.7	42' / 12.8	21'6" / 6.6
Width – dual tires (ft / m) <i>*Widest configuration noted. Narrower options may be available.</i>	21'6" / 6.6	21'6" / 6.6	21'6" / 6.6	21'6" / 6.6	21'6" / 6.6
# of 260 bushel tanks / # of 9,163 litre tanks	2	2	2	3	3
# of 110 bushel tanks / # of 3,876 litre tanks	N/A	N/A	1	N/A	N/A
# of 40 bushel rear-mount tank / # of 1,410 litre rear-mount tank <i>*For tow-behind models only.</i>	OPTIONAL	1	N/A	OPTIONAL	1
Real-time product weighing technology and in-cab readouts	STANDARD	STANDARD	STANDARD	STANDARD	STANDARD
Auto Zone Command™	STANDARD	STANDARD	STANDARD	STANDARD	STANDARD
Dual cart wheels 710-70R38 on 1030 hubs	OPTIONAL	OPTIONAL	OPTIONAL	STANDARD	STANDARD
Single cart wheels 800-65R32	STANDARD	STANDARD	STANDARD	N/A	N/A
Liquid fertilizer (Change rear 260 bushel tank to 2,000 imp gal)	OPTIONAL <i>(Tow behind only)</i>	N/A	N/A	OPTIONAL <i>(Tow behind only)</i>	N/A
High-capacity, all-hydraulic 16" / 40.64 cm conveyor slide-out hopper	OPTIONAL	OPTIONAL	OPTIONAL	OPTIONAL	OPTIONAL
Configuration*	TBH/TBT	TBH	TBH/TBT	TBH/TBT	TBH



# FIELD TECHNOLOGY

## MAXIMIZING YOUR EFFICIENCY.

On-farm technology is evolving at a rapid rate. It's a large part of what makes us efficient, precise, and profitable. Our software integrations, and the use of precision agricultural technology, ensures that you are getting the most out of your equipment, your time, and your inputs.



### RAVEN VIPER 4+

The Raven Viper 4+ allows growers to control and monitor multiple functions on one display. This field computer pulls many of SeedMaster's innovative technologies together in one easy to access location.




### AUTO ZONE COMMAND

This SeedMaster product prevents double application of seed and fertilizer in irregular fields and at headlands. Auto Zone utilizes the Raven Viper4+ field computer, and can save farms between 5-15% in inputs.



### APPLIED PRODUCT CALIBRATION

Fine tune your metering system to achieve proper calibration weight that accounts for the ever-changing humidity, inconsistent product, and product density.

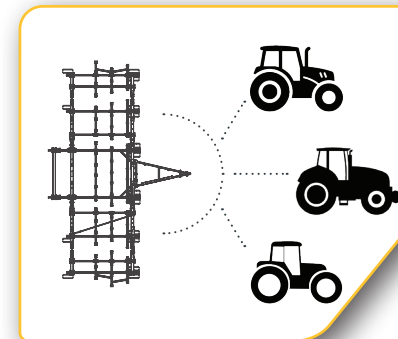


### ISOBUS READY

Use any ISOBUS field computer to utilize a variety of SeedMaster features, including Smart Openers, Automatic Packing Pressure, Matrix Wing Lock, Applied Product Calibration, and more.



### REMOTE TANK MONITOR

Paired with Raven's RCM, this is a great tool for performing diagnostics. View tank weights, zero out tank weights, calibrate products, and test your Auto Zone Command with the Remote Tank Monitor.

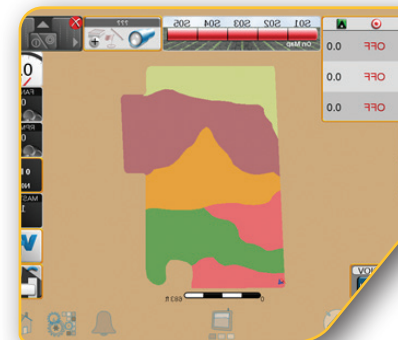


### VARIABLE RATE APPLICATION

Allows variable rate control for up to 10 products across three rate control modules, providing increased versatility for the end user.




TOOLBAR  
DIMENSIONS

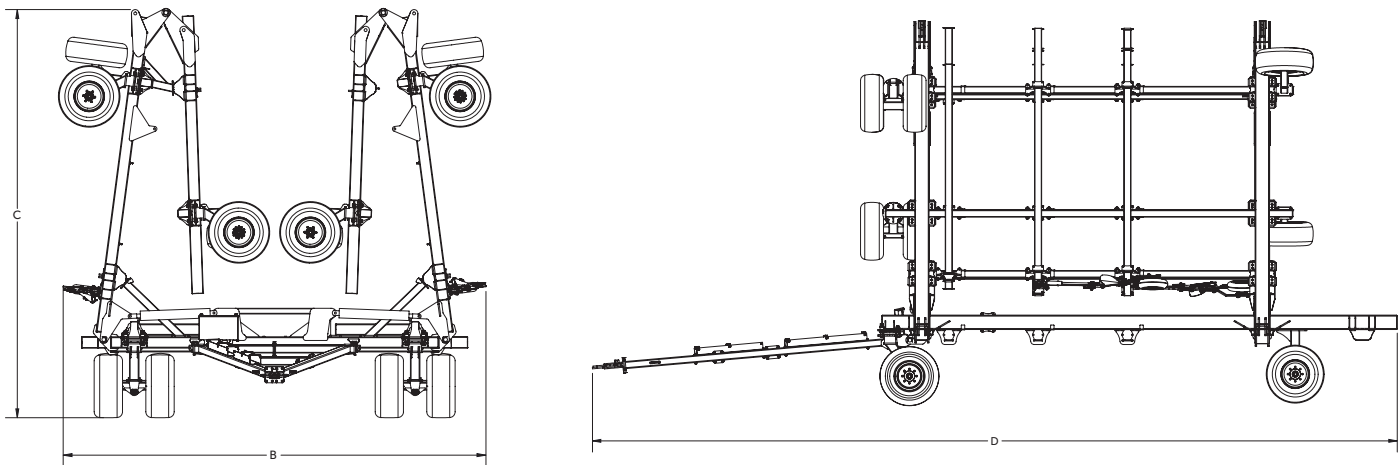

WORKING WIDTH	B - MAX WIDTH OF ENTIRE IMPLEMENT		C - MAX HEIGHT OF IMPLEMENT		D - ENTIRE LENGTH OF IMPLEMENT	
	Rear Tire Size Options: 380/55R16.5 750/65R26 800/65R32		FT	M	FT	M
FT	FT	M				
40' CT	19'2"	5.84	16'2"	4.93	37'8"	11.48
50' CT	20'2"	6.15	14'1"	4.29	37'8"	11.48
60' CT	20'8"	6.3	16'	4.88	37'8"	11.48
70' CT	19'10"	6.05	18'2"	5.54	37'8"	11.48
80' CT	22'5"	6.83	20'2"	6.15	37'8"	11.48
80' Wide M	25'4"	7.72	18'2"	5.54	37'8"	11.48
90' Wide M	25'9"	7.85	21'	6.4	37'8"	11.48
100' Wide M	26'1"	7.95	23'6"	6.65	37'8"	11.48

ULTRAPRO II ON-FRAME  
DIMENSIONS

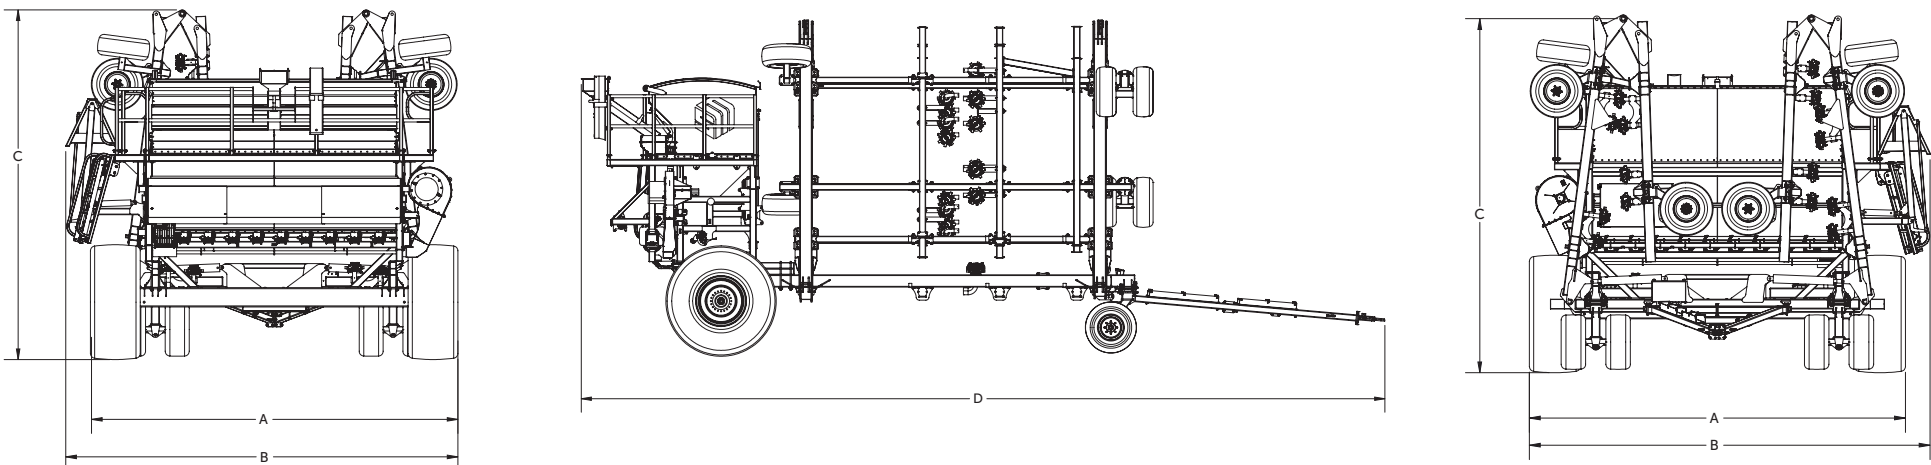

WORKING WIDTH	Rear Tire Size										ULTRAPRO Tank Size					
	800/65R32		1050/50R32		710/70R38 Duals		Camso Tracks		HEIGHT		UPII350		UPII360		UPII530/550	
	A		B		A		B		C		D		D		D	
	FT	M	FT	M	FT	M	FT	M	FT	M	FT	M	FT	M	FT	M
40' CT	19'1"	5.82	20'4"	6.2	20'11"	6.38	21'3"	6.48	24'7"	7.49	20'9"	6.32	21'2"	6.45	16'2"	4.93
50' CT	19'1"	5.82	20'4"	6.2	20'11"	6.38	21'3"	6.48	24'7"	7.49	20'9"	6.32	21'2"	6.45	15'9"	4.8
60' CT	19'1"	5.82	20'4"	6.2	20'11"	6.38	21'3"	6.48	24'7"	7.49	20'9"	6.32	21'2"	6.45	16'	4.88
70' CT	19'1"	5.82	20'4"	6.2	20'11"	6.38	21'3"	6.48	24'7"	7.49	20'9"	6.32	21'2"	6.45	18'2"	5.54
80' CT	19'1"	5.82	20'4"	6.2	20'11"	6.38	21'3"	6.48	24'7"	7.49	20'9"	6.32	21'2"	6.45	20'2"	6.15
80' Wide M	19'1"	5.82	25'4"	7.72	20'11"	6.38	25'4"	7.72	24'7"	7.49	20'9"	6.32	25'4"	7.72	18'2"	5.54

A Max width of ground foot print  
B Max width of the entire implement  
C Max height of the implement  
D Entire length of the implement



# VISION. PROMISE. VALUES.

## VISION

Inspiring farmers to grow  
with confidence, pride,  
and curiosity.

## VALUES

**INTEGRITY**

**INNOVATION**

**PRECISION**

**DEPENDABILITY**

## PROMISE

Maximizing your farm's  
potential for a more  
profitable future.





6012 Toolbar  
UltraPro II 360  
Nova Series II 520







Toll Free: 1.888.721.3001  
Phone: 306.721.3001  
Fax: 306.721.3002

#1 South Plains Road West  
Emerald Park, Saskatchewan  
Canada S4L 1C6

[www.SeedMaster.ca](http://www.SeedMaster.ca)